



# HiLumen Amber Round Dome Bollards

**L70**  
25°C **147,000 Hours**



**Glass BOGQ**



**LED Cone Reflector BORLQ**




**Shown with "S3" Sensor**



**Shown with GFCI**



**Louvers BOLQ**



**Dimensions**

**Diameter (D)** 7" (178mm)  
**Height (A)** 42¼" (1,073mm)

The HiLumen Amber Bollards are designed to provide a direct 1-to-1 replacement for 35w Low Pressure Sodium (LPS) lighting systems. These fixtures are ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

**Specifications and Features:**

**Housing:**

Extruded Aluminum Housing with Flush Mounting Base & Vandal-Resistant Screws, Domed Top, Internal Ballast Tray for Easy Maintenance. Bollards Can Be Cut to Custom Lengths Upon Request.

**Listing & Ratings:**

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP65 Sealed LED Compartment.

**Finish:**

Textured Architectural Bronze or Black Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

**Style:**

Clear Prismatic Borosilicate Glass Refractor, Specially Designed Cone Reflector or Internal Louvers

**Lens:**

Clear UV-Stabilized Polycarbonate Vandal-Resistant Lens

**Mounting Options:**

Mounting Kit with 8" Anchor Bolts, Included.

**HiLumen Amber LED:**

Aluminum Boards

**Wattage:**

Array: 15w, System: 16.5w; (35w SOX LPS Replacement)

**Driver:**

Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

**Controls:**

Fixtures Ordered with Factory-Installed Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPC Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

**Warranty:**

5-Year Warranty for -40°C to +40°C Environment.

See Page 2 for Projected Lumen Maintenance Table.

**Order Information Example:**

**BORLQF1X15UHAZ36SF**

	<b>F</b>	<b>1X15</b>	<b>U</b>	<b>HA</b>			
<b>Model</b>	<b>Optics</b>	<b>Wattage</b>	<b>Driver</b>	<b>CCT</b>	<b>Color</b>	<b>Height</b>	<b>Options</b>
<b>BOGQ</b> =HiLumen Amber Round Dome Bollard with Glass <b>BORLQ</b> =HiLumen Amber Round Dome Bollard with LED Cone Reflector <b>BORWQ</b> =HiLumen Amber Round Dome Bollard with White LED Cone Reflector <b>BOLQ</b> =HiLumen Amber Round Dome Bollard with Louvers	<b>F</b> =Wide Beam Spread	<b>1X15</b> =15w	<b>U</b> =120-277V	<b>HA</b> =HiLumen Amber	<b>Z</b> =Bronze <b>B</b> =Black <b>C</b> =Custom (Consult Factory)	<b>(Leave Blank)</b> =42" Standard Height <b>36</b> =36" Height <b>30</b> =30" Height	<b>SF</b> =Single Fuse (120-277V Only) <b>DF</b> =Double Fuse (120-277V Only) <b>SP</b> =Surge Protection <b>GF1</b> =GFCI Outlet, 15A, 120V <b>GSB</b> =180° Glare Shield, Black <b>GSZ</b> =180° Glare Shield, Bronze <b>GSC</b> =180° Glare Shield, Custom Color (Consult Factory) <b>S3</b> =Internal Microwave Sensor (120-277V Only) <b>BU</b> =Battery Backup, 90 Minutes

**Project Information:**

Project Name: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 Complete Catalog #: \_\_\_\_\_ Date: \_\_\_\_\_  
 Comments: \_\_\_\_\_

**Certification & Listings:**





## Accessories & Replacement Parts:



Mounting Accessories (Order Separately, Field Installed)	
BOLAN4	Mounting Kit, Includes Bracket & Three (3) 4" Anchor Bolts
BOLAN8	Mounting Kit, Includes Bracket & Three (3) 8" Anchor Bolts
BOLAN12	Mounting Kit, Includes Bracket & Three (3) 12" Anchor Bolts
BOLAN15	Mounting Kit, Includes Bracket & Three (3) 15" Anchor Bolts
BREBASE*	Bollard Retrofit Base Kit Adapts New Bollards to Most Existing Bolt Patterns. Fits all LEPG Bollards. Die Cast with Powdercoat Finish, Hardware Included. 1 1/2" Dia. x 1 1/2" H

\*Specify Color: Z=Bronze, B=Black, C=Custom (Consult Factory)

Accessories (Order Separately, Field Installed)	
P17122	Remote Programming Tool for P17121


Replacement Parts (Order Separately, Field Installed)	
P17121	Internal Microwave Sensor (120-277V Only)
BOLPC	Replacement Round UV-Stabilized Polycarbonate Vandal-Resistant Lens
BORBASE*	Die Cast Base Plate with Powdercoat Finish over a Chromate Conversion Coating.
BOADP1	Adapter Plate with Gaskets for Outlet Boxes. Fits LEPG Round Bollards. Die Cast with Bronze Powdercoat Finish.

\*Specify Color: Z=Bronze, B=Black, C=Custom (Consult Factory)


For Replacement Battery Backup, see the LEPG LED Battery Backup Specification Sheet.

\*Shown Mounted

## Photometric Data

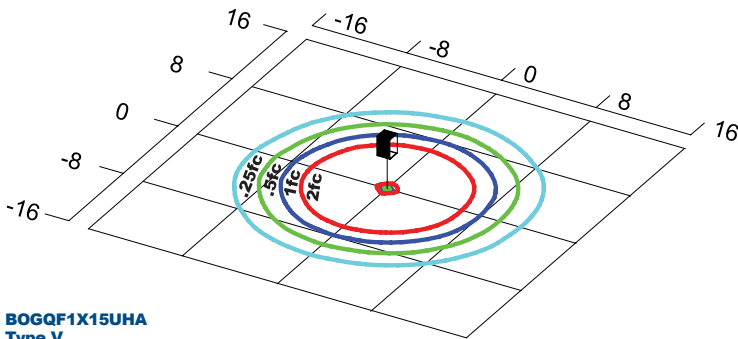

**BOGQF1X15UHA**  
 Type V  
 Grid in feet, Mounting Height=3.5 ft.

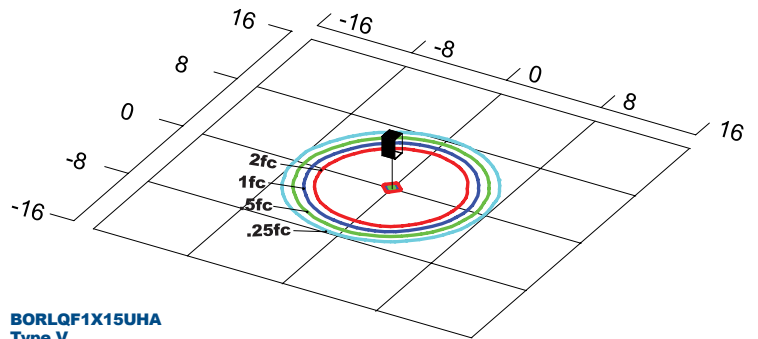


**BORLQF1X15UHA**  
 Type V  
 Grid in feet, Mounting Height=3.5 ft.

## Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	HiLumen Amber				
				Lumens	LPW	B	U	G
HiLumen Amber 15w	116	17	BOG Glass	883	52	1	3	1
			BOL Louvers	595	35	0	2	0
			Cone Reflectors	1,178	69	1	3	1

## Spectral Chart

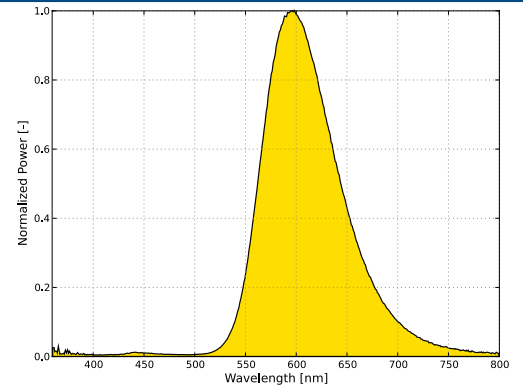

## Projected Lumen Maintenance

Data shown for HiLumen Amber			Compare to LPS			
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
<b>L70 Lumen Maintenance @ 25°C / 77°F</b>	17	1.00	0.95	0.90	0.80	147,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C
<b>L70 Lumen Maintenance @ 50°C / 122°F</b>	17	1.00	0.89	0.78	0.55	67,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C
<b>L80 Lumen Maintenance @ 40°C / 104°F</b>	17	1.00	0.92	0.85	0.70	66,000

**NOTES:**  
 1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 116mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.  
 2. Compare to LPS box indicates suggested Light Loss Factor (LLF) to be used when comparing to Low Pressure Sodium (LPS) systems.

Specifications subject to change without notice. Rev. 032620