



AmberLED Stainless Steel Bollards

L70
25°C **147,000 Hours**




LED Cone Reflector BOWRLQ



Shown with "S3" Sensor



Shown with GFCI



Dimensions

Diameter (D) 7" (178mm)
Height (A) 41 1/4" (1,060mm)



TURTLE-SAFE

The AmberLED Bollards are available with cone reflector or louvers with 270° glare shield, and are certified by the Florida Fish & Wildlife Conservation Commission (FWC) for wildlife applications that are directly visible from the shore requiring monochromatic AMBER light. LEDs operate between 585 and 595 nm, greater than 560nm required by FWC. Typical applications include retail centers, hotels, residential, parks, schools and universities, office buildings and medical facilities.

Specifications and Features:

Housing:

Formed 316L Stainless Steel Housing with Flush Mounting Base & Vandal-Resistant Screws, Domed Top, Internal Ballast Tray for Easy Maintenance. Includes 270° Shield Required to Maintain FWC Certification.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750
 IP65 Sealed LED Compartment.

Style:

Specially Designed Aluminum Cone Reflector or Internal Louvers

Lens:

Clear UV-Stabilized Polycarbonate Vandal-Resistant Lens

Mounting Options:

Mounting Kit with 8" Zinc-Plated Anchor Bolts, Included.

AmberLED:

Aluminum Boards

Wattage:

Array: 14.5w, System: 17w; (70w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Controls:

Fixtures Ordered with Factory-Installed Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPC Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty:

5-Year Warranty for -40°C to +40°C Environment.

See Page 2 for Projected Lumen Maintenance Table.

AmberLED



Certification #2018-001

Order Information Example:

BOWRLQF1X15UAMSS36SF

	F	1X15	U	AM	SS		
Model	Optics	Wattage	Driver	CCT	Color	Height	Options
BOWRLQ =Round Dome Bollard with LED Cone Reflector and 270° Shield BOWLQ =Round Dome Bollard with Louvers and 270° Shield	F =Wide Beam Spread	1X15 =15w	U =120-277V	AM =Amber	SS =Stainless Steel	(Leave Blank) = 42" Standard Height 36 =36" Height 30 =30" Height	SF =Single Fuse (120-277V Only) DF =Double Fuse (120-277V Only) SP =Surge Protection GF1 =GFCI Outlet, 15A, 120V S3 =Microwave Sensor with Dimming & Remote Programming, 120-277V Only. See P17121 Spec. Page for Details. BU =Battery Backup, 90 Minutes

Project Information:

Project Name: _____ Fixture Type: _____
 Complete Catalog #: _____ Date: _____
 Comments: _____

Certification & Listings:



Specifications subject to change without notice. Rev. 072720




Accessories & Replacement Parts:



*Shown Mounted

Mounting Accessories (Order Separately, Field Installed)		Accessories (Order Separately, Field Installed)		Replacement Parts (Order Separately, Field Installed)	
BOLAN4	Mounting Kit, Includes Bracket & Three (3) 4" Zinc-Plated Anchor Bolts	P17122	Remote Programming Tool for P17121	P17121	Internal Microwave Sensor with Dimming & Remote Programming, 120-277V Only. See P17121 Spec. Page for Details.
BOLAN8	Mounting Kit, Includes Bracket & Three (3) 8" Zinc-Plated Anchor Bolts			BORBASE	Die Cast Base Plate with Black Powdercoat Finish Over a Chromate Conversion Coating.
BOLAN12	Mounting Kit, Includes Bracket & Three (3) 12" Zinc-Plated Anchor Bolts			BOADP1	Adapter Plate with Gaskets for Outlet Boxes. Fits LEPC Round Bollards. Die Cast with Bronze Powdercoat Finish.
BOLAN15	Mounting Kit, Includes Bracket & Three (3) 15" Zinc-Plated Anchor Bolts				For Replacement Battery Backup, see the LEPC LED Battery Backup Specification Sheet.
BREBASE*	Bollard Retrofit Base Kit Adapts New Bollards to Most Existing Bolt Patterns. Fits all LEPC Bollards. Die Cast with Powdercoat Finish, Hardware Included. 1 1/2" Dia. x 1 1/2" H				
*Specify Color: Z=Bronze, B=Black, C=Custom (Consult Factory)					

Photometric Data

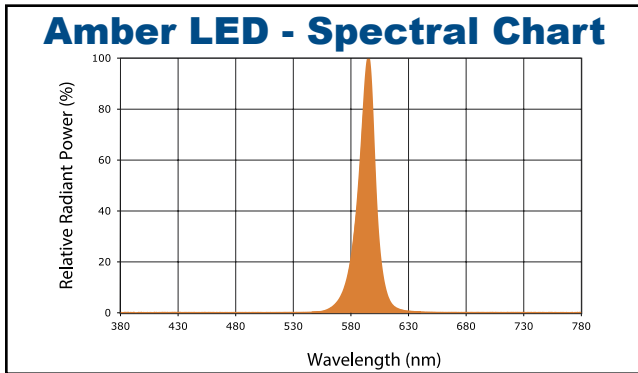

Projected Lumen Maintenance

Data shown for Amber LEDs	Compare to MH						
	TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
L70 Lumen Maintenance @ 25°C / 77°F	TM-21-11	17	1.00	0.95	0.90	0.80	147,000
L70 Lumen Maintenance @ 50°C / 122°F	TM-21-11	17	1.00	0.89	0.78	0.55	67,000
L80 Lumen Maintenance @ 40°C / 104°F	TM-21-11	17	1.00	0.92	0.85	0.70	66,000

NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 116mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.