

Flood Series

23" Flood with Wide Angle Reflector



FL90W

Housing:

Die Cast Aluminum Housing & Hinged Top Frame, Safety Cable Restraint, 1/2" Coin Plugs with O-rings for Conduit & Photocell, Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating

Reflector:

Wide Angle Aluminum Reflector

Lens:

Tempered Flat Clear Glass Lens

Socket:

Porcelain 5KV Pulse Rated Mogul Base with Nickel Plated Screw Shell

Mounting:

Mount with Two-Piece Swivel Bracket, Adjustable Slipfitter, 6" Extruded Mounting Arms, Yoke or Direct Pole Mount Arm

Wattage:

High Pressure Sodium: 400 to 1000w

Metal Halide: 1000w

Pulse Start: 400 to 1000w


Listing & Ratings:

CSA: Listed for Wet Locations

Custom Colors Available Upon Request.

Kit(s)	Description			
Catalog #	Description			
FL90W#	23" Flood with Wide Angle Reflector, HID Kit			
Complete Units (Lamp Included)				
Catalog #	Wattage	Voltage	Lamp	Ballast
FL90WH400QL*#	400	Quad	HPS	CWA
FL90WH1000QL*#	1000	Quad	HPS	CWA
FL90WH1000480L*#	1000	480	HPS	CWA
FL90WM1000QL*#	1000	Quad	MH	CWA
FL90WP400QL*# [Ⓔ]	400	Quad	PS	CWA
FL90WP750QL*#	750	Quad	PS	CWA
FL90WP875QL*#	875	Quad	PS	CWA
FL90WP1000QL*#	1000	Quad	PS	CWA
*Specify Mounting: BR=Bracket Mount, SF=Slipfitter Mount, LY=Large Yoke				
#Specify Twist Lock Photocell: P40=P18140 110-120VAC Instant, P42=P18142 110-277VAC Instant, P50=P18150 120VAC Time Delay, P52=P18152 277VAC Time Delay				

DIMENSIONS

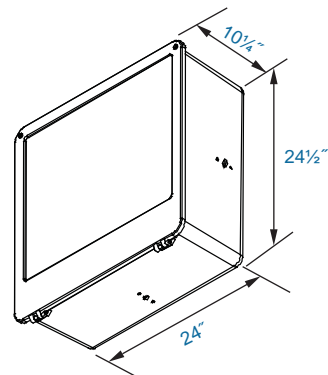


FL90W

KELSEY-KANE LIGHTING MFG. CO.
 Voice & Text: 954-772-3187
 E-Mail: info@kelsey-kane.com
 Website: www.kelsey-kane.com

Catalog #	Description
FL90BF	Baffle, Aluminum with Black Powdercoat Finish
FL90GS	Glare Shield, Aluminum, Bronze Powdercoat Finish (Can be reverse mounted as a back cutoff.)
AL90LG	Clear Polycarbonate Vandal Resistant Guard
AL90WG	Wire Guard, Stainless Steel Construction
FL90BR	Two-Piece Swivel Bracket, Stamped, Bronze Finish
FL90SFX	External Mount Slipfitter, Die Cast, Hardware & Angle Indicator Coin Plug
FLAM	Heavy Duty Adjustable Direct Mount Pole Arm, Bronze Finish, Angle Indicators & Hardware. Fits 4" to 6" Round Poles.
FL90LY	Yoke, Stamped Heavy Duty Steel, Textured Bronze Finish
FLEM6*	6" Aluminum Extruded Mounting Arm, Bronze, Gasket & Hardware. Fits Square Poles.
CPSC	3' Steel Cable with Clear Vinyl Coating, Steel Eye & Loop Ends
PTASUNV	Square Pole Tenon Adaptor Allows Installation of up to 4 Fixtures, Fits 2 3/4" Diameter Vertical Tenon, Bronze Finish. Use FLEMs.
FLEMWM	Heavy-duty Steel Wall Bracket for FLEM Mounting Arms, Bronze Powdercoat Finish.
P18130	480VAC Twist Lock Photocell Receptacle
P18131	Twist Lock Non-Shorting (Open) Cap Disconnects Service to Fixture for Temporary or Permanent Disabling (Fixture Always Off). IP65, 480V Maximum.
P18132	Twist Lock Shorting Cap Provides Fixed Service to Fixture (Fixture Always on). IP65, Rated Load 7200w Tungsten.
P18140	110-120VAC Instant Twist Lock
P18142	110-277VAC Instant Twist Lock
P18150	120VAC Time Delay Twist Lock
P18152	277VAC Time Delay Twist Lock


*Add R for Round Pole Mounting, Fits 4" Diameter Poles.

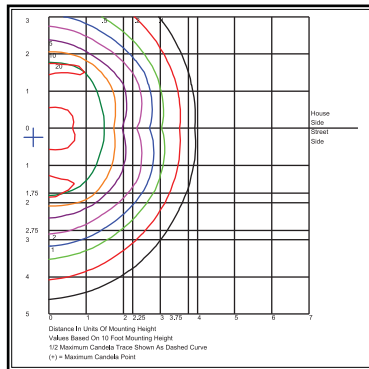

FL90WM1000

Flood Series

23" Flood with Wide Angle Reflector



FL90BF
(Shown Mounted)



FL90GS
(Shown Mounted)



AL90LG



AL90WG
(Shown Mounted)



FL90BR



FL90SFX



FLAM



FL90LY



FLEM6



CPSC



PTASUNV



FLEMWM



P18130



P18131



P18132



**P18140,
P18142**



**P18150
P18152**

KELSEY-KANE LIGHTING MFG. CO.
 Voice & Text: 954-772-3187
 E-Mail: info@kelsey-kane.com
 Website: www.kelsey-kane.com