




HLV2AQ

L70
25°C

138,000 Hours

Hazardous Location EasyLED 24" Linear LED Die Cast

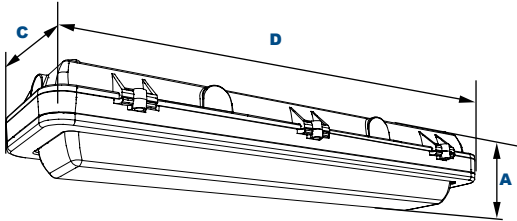

Dimensions

Width (D)	24 1/8" (614mm)
Length (C)	7" (178mm)
Height (A)	4" (102mm)

Order Information Example:

HLV2AQF66U5KCG

HLV2AQQ	F					
Model	Optics	Wattage	Driver	CCT	Lens	Color
HLV2AQQ=EasyLED Open Frame 24" Linear LED Die Cast	F=Wide	47=47w 66=66w	U=120-277V H=347-480V	4K=4000K 5K=5000K	C=Clear Polycarbonate Vandal-Resistant Lens L=LumaLens Opal Polycarbonate Vandal-Resistant Lens	G=Gray P=Platinum



HLV2A Class 1, Division 2 Hazardous Location series wall and ceiling mount luminaire is available with clear or LumaLens lenses and open door frame designed to replace HID lighting systems from 175w to 250w MH or HPS. Typical lighting applications include industrial facilities, oil, gas, painting facilities, and auto service facilities. Mounting heights of 12 to 25 feet can be used based on light level and uniformity requirements.

Specifications and Features:

Housing:

Heavy-Duty Die Cast Aluminum Housing and Top Frame, with 1/2" Tapped Coin Plug Openings for Wiring Entrance Conduits.

Listing & Ratings:

ETL Listed for Hazardous Locations Per UL844 as Follows:
 Class 1, Division 2 Groups A, B, C, D
 T4 Temperature Rating

Finish:

Powdercoat Finish Over a Chromate Conversion Coating.

Lens:

Clear Polycarbonate Vandal-Resistant Lens or LumaLens Opal Polycarbonate Vandal-Resistant Lens

Mounting Options:

Surface with Conduit Entry, Rated for 6 #12 AWG 90°C for through wiring. Stainless Steel Adjustable Bracket and Yoke Available.

EasyLED LED:

Aluminum Boards

Wattage:

47 Watt: Array: 47w, System: 57.8w (175w HID Equivalent)
 66 Watt: Array: 66w, System: 77.3w (250w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Warranty:

5-Year Warranty for -25°C to +40°C Environment.

See Page 2 for Projected Lumen Maintenance Table.

Project Information:

Project Name: _____ Fixture Type: _____

Complete Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:



Class 1, Division 2
Groups A, B, C, D
T4 Temperature Rating






Accessories & Replacement Parts:




Mounting Accessories (Order separately, Field installed)	
LVABRSS	Stainless Steel Adjustable Bracket, Set of Two
LV2AYSS	Stainless Steel Yokes for HLV2A, Includes Hardware.

*Shown Mounted

Photometric Data

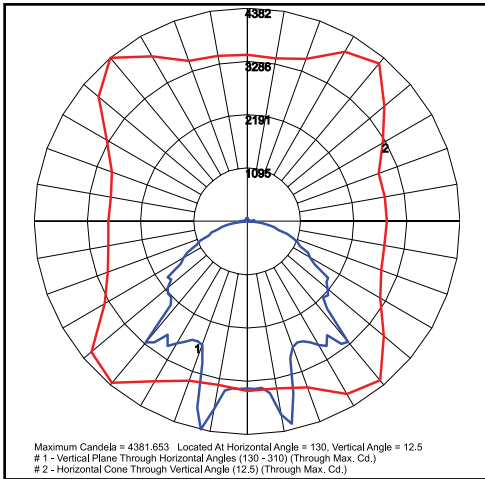

HLV2AQF66U5KC
 Clear Lens

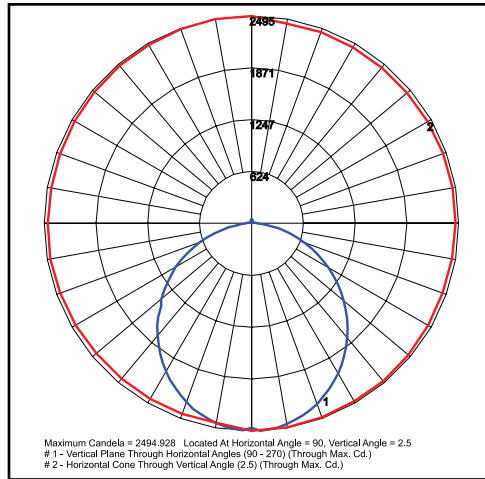

HLV2AQF66U5KL
 LumaLens

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	Spacing Criteria	5000 CCT 80 CRI		4000 CCT 80 CRI	
					Lumens	LPW	Lumens	LPW
EasyLED 47w (Clear Lens)	116	58	Open Frame (100° x 100°)	1.22	7,309	126	7,017	121
EasyLED 47w (LumaLens)			Open Frame (110° x 130°)	1.30	5,932	102	5,695	98
EasyLED 66w (Clear Lens)		77	Open Frame (100° x 100°)	1.22	10,294	134	9,882	128
EasyLED 66w (LumaLens)			Open Frame (110° x 130°)	1.30	8,356	109	8,021	104

Projected Lumen Maintenance

Data shown for 5000 CCT			Compare to MH			
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
L70 Lumen Maintenance @ 25°C / 77°F	58	1.00	0.95	0.90	0.81	154,000
L70 Lumen Maintenance @ 25°C / 77°F	77	1.00	0.95	0.89	0.78	138,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C
L80 Lumen Maintenance @ 40°C / 104°F	58	1.00	0.93	0.86	0.71	69,000
L80 Lumen Maintenance @ 40°C / 104°F	77	1.00	0.92	0.84	0.68	62,000

NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 116mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.