

Emergency/Exit Lighting

Low Profile LED Exit Sign



EEXSRB2

Illumination:

- Ultra-Bright, Energy Efficient, Long-Life Red or Green LED.

Electrical:

- Dual 120/277 Voltage.
- Charge Rate/Power "ON" LED Indicator Light and Push-to-Test Switch for Mandated Code Compliance Testing.
- Long-Life, Maintenance-Free, Rechargeable NiCd Battery.
- Internal Solid-State Transfer Switch Automatically Connects the Internal Battery to LED Lamp Heads for Minimum 90-minute Emergency Illumination.
- Fully Automatic Solid-State, Two-Rate Charger Initiates Battery Charging to Recharge a Discharged Battery in 24 hours.

Mounting:

- EZ-Snap Mounting Canopy Included for Top or End Mount.
- Universal K/O Pattern on Back Plate for Wall Mount.

Housing:

- Injection-Molded, Engineering-Grade, 5VA Flame Retardant, High-Impact Resistant, Thermoplastic in White Finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out Chevron directional indicators
- Single or Double Face

Warranty/Listing:

- Five Year Warranty on All Electronics and Housing. Battery Pro-Rated for Five Years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for Damp Locations.

KELSEY-KANE LIGHTING MFG. CO.


Voice & Text: 954-772-3187

E-Mail: info@kelsey-kane.com

Website: www.kelsey-kane.com

Catalog #	Housing	Lettering	Voltage
EEXSRB2	White	Red	120/277
EEXSGB2	White	Green	120/277

DIMENSIONS

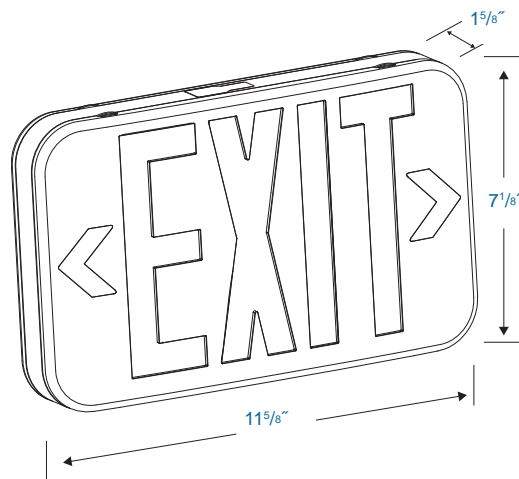

EEXS