

Lighting Components

Pencil Control



P18110
P18112




- Control Passage & Doorway Lighting Automatically For Ambient Lighting
- Convenient Directional Control
- Rain Tight For Outdoor Use
- 6" Leads
- Thermal Switch
- Polycarbonate Enclosure & Eye
- 1/2" CdS Photocell
- 1/2" - Threaded Conduit with Rubber Gasket & Zinc Alloy Lock-Nut
- Swivels 0-200°
- **On-Off Levels:** 10-20Lx On(Dusk); 30-60Lx Off(Dawn)
- **Ambient Temp:** -40°F ~ +158°F
- **Relative Humidity:** 96%
- **Power Consumption:** 1.5VA Max.
- **Electrical Life:** 6500 Cycles
- **Ballast:** 1100VA
- **Tungsten:** 1800w

Catalog #	Type	Voltage	Rating	Leads
P18110	Pencil	110-130V	120VAC	6" AWG#16 AWM3321, 150°C
P18112	Pencil	208-277V	240VAC	6" AWG#16 AWM3321, 150°C

KELSEY-KANE LIGHTING MFG. CO.
Voice & Text: 954-772-3187
E-Mail: info@kelsey-kane.com
Website: www.kelsey-kane.com

DIMENSIONS

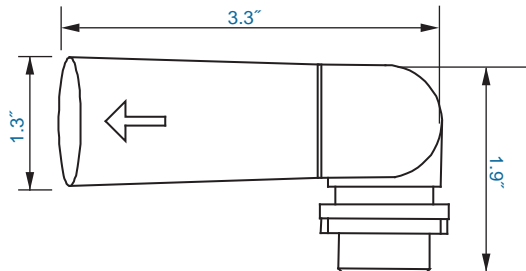

P18110
P18112