

EasyLED Series

Reveal Small Post Top Area Light - Enclosed



PF71Q

Housing:

Die Cast Aluminum Housing, Integral Heat Sinking, Black Powdercoat Finish Over a chromate Conversion Coating. Photocell Adaptable.

Lens:

Clear Prismatic Array Lens to Seal LED Array. Polycarbonate Prismatic Outer Conical Lens.

Mounting:

Accommodates 3" Tenons

LumaFit LED:

Delivered Lumens: 6,391

CRI: 80+

CCT: 5000K

Rated Life: 50,000 Hours

5-Year Warranty

Aluminum Boards

Wattage:

Array: 84w, System: 92.7w

Driver:

Electronic Driver, 120-277V, 50/60Hz

Dimmable Driver

Listings & Ratings:

IP67

Operating Temperatures: -40°C to +50°C

Options:

Surge Protection

KELSEY-KANE LIGHTING MFG. CO.

Voice & Text: 954-772-3187

E-Mail: info@kelsey-kane.com

Website: www.kelsey-kane.com

Reveal Small Post Top Area Light - Enclosed

Catalog #

Description


Complete Units

Ordering Information

Example: PF71QF1X84U5KCBSP

PF71	Model:	PF71
Q	LED Mfr:	Q=QSSI
F	Optics:	F=Type V
1X	Number of Arrays:	1X=One
84	Wattage:	84=84w
U	Ballast:	U=120-277V
5K	CCT:	5K=5000K
C	Lens:	C=Clear Prismatic Array Lens
B	Color:	B=Black
SP	Options:	SF=Single Fuse, DF=Double Fuse, SP=Surge Protection

DIMENSIONS

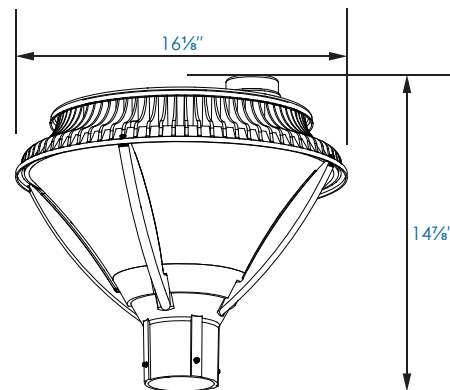

PF71Q


Catalog #	Description
PF70PC	Polycarbonate Outer Conical Lens.

EasyLED Series

**Reveal Small Post Top
Area Light - Enclosed**



PF70PC
(Shown Installed)

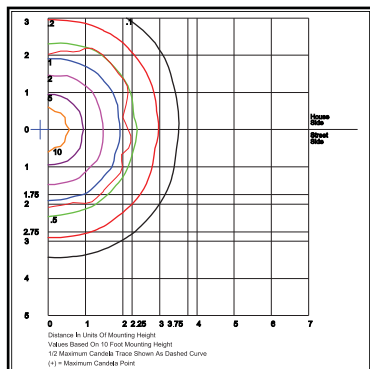

PF71QF1X84U5KC

KELSEY-KANE LIGHTING MFG. CO.
Voice & Text: 954-772-3187
E-Mail: info@kelsey-kane.com
Website: www.kelsey-kane.com