

EasyLED Series

Reveal Square Post Top Area Light



PFS80Q

Housing:

Die Cast Aluminum Housing, Integral Heat Sinking, Black Powdercoat Finish Over a Chromate Conversion Coating. Photocell Adaptable.

Lens:

Clear Prismatic Array Lens to Seal LED Array.

Mounting:

Accommodates 3" Tenons

LumaFit LED:

Array Lumens: 24,553

Delivered Lumens: 18,883

CRI: 80+

CCT: 5000K

Rated Life: 50,000 Hours

5-Year Warranty

Aluminum Boards

Wattage:

Array: 176w, System: 186w

Driver:

Electronic Driver, 120-277V, 50/60Hz

Dimmable Driver

Listings & Ratings:

IP67

Operating Temperatures: -40°C to +50°C

Options:

Surge Protection

KELSEY-KANE LIGHTING MFG. CO.

Voice & Text: 954-772-3187

E-Mail: info@kelsey-kane.com

Website: www.kelsey-kane.com

Reveal Square Post Top Area Light

Catalog #

Description


Complete Units

Ordering Information

Example: PFS80QF1X176U5KCBSP

PFS80	Model:	PFS80
Q	LED Mfr:	Q=QSSI
F	Optics:	F=Type V
1X	Number of Arrays:	1X=One
176	Wattage:	176=176w
U	Ballast:	U=120-277V
5K	CCT:	5K=5000K
C	Lens:	C=Clear Prismatic Array Lens
B	Color:	B=Black
SP	Options:	SF=Single Fuse, DF=Double Fuse, SP=Surge Protection

DIMENSIONS

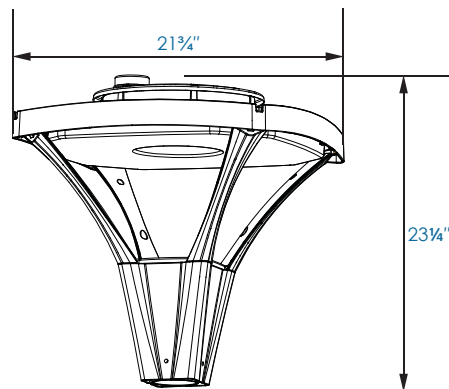

PFS80Q