

LumaSoft Series

Direct/Indirect Fluorescent Troffers



Housing:

Direct/Indirect Formed Cold Rolled Steel Housing. Post-Painted with Flat White Polyester Powdercoat Finish Over a Nanoceramic Treatment to Provide Enhanced Corrosion Resistance and Better Paint Adhesion. Recessed Models Include Built-in Earthquake Brackets. Low Profile for Shallow Plenum Spaces.

Diffuser:

Translucent Acrylic Diffuser or Micro-Perforated Steel with Flat White Polyester Powdercoat Finish

Socket:

T5 or T8 Fluorescent Sockets

Ballast:

T5 & T5HO: Program Start
T8: Instant Start

Mounting:

Recessed Mount in Inverted T-Bar Grid Ceilings. Surface Mount Models Include Matching Powdercoated Steel Surface Kit for a Finished Appearance.

Wattage:

1x4 T5: 1 or 2 x 28w or 54wHO
T8: 1 or 2 x 32w
2x2 T5: 1, 2 or 3 x 14w or 24wHO
T8: 1, 2 or 3 x 17w
2x4 T5: 1, 2 or 3 x 28w or 54wHO
T8: 1, 2 or 3 x 32w

Listing & Ratings:

CSA: Listed for Dry Locations

Lamps Not Included, Sold Separately.
Flex Whip Sold Separately.

KELSEY-KANE LIGHTING MFG. CO.

Voice & Text: 954-772-3187




E-Mail: info@kelsey-kane.com

Website: www.kelsey-kane.com

LumaSoft Direct/Indirect Fluorescent Troffers

Catalog #	Description	
Complete Units		
Ordering Information		
Example: L224P3T5HO54US1		
L2	Model:	L2= Recessed Mount, L3=Surface Mount
24	Size:	14=1'x4', 22=2'x2', 24= 2'x4'
P	Diffuser:	C=Translucent Acrylic Diffuser P=Micro-Perforated Steel Diffuser
3	# of Lamps	1=1, 2=2, 3=3, *1'x4': Maximum 2 Lamps
T5HO54	Lamp Type:	22 Model: T514=T5, 14w; T5HO24=T5, 24w HO; T817=T8, 17w; 14 & 24 Models: T528=T5, 28w; T5HO54=T5, 54w HO; T832=T8, 32w
U	Ballast:	U=120-277V, 50/60Hz; 1=120V, 50/60Hz; 2=277V, 50/60Hz; 3=347V, 50/60Hz; 4=480V, 50/60Hz
S1	Options:	D3=0-10V Dimming SF=Single Fuse, S1=20K Surge Protector PS=T8 Program Start Ballast, B=Battery Backup

DIMENSIONS

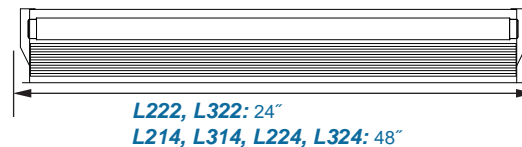

KELSEY-KANE LIGHTING MFG. CO.

Voice & Text: 954-772-3187

E-Mail: info@kelsey-kane.com

Website: www.kelsey-kane.com

Catalog #	Description
U6F38FMC183S9	6' 3/8" FMC Flex Whip, 18/3, Straight and 90° Connectors

LumaSoft Series

Direct/Indirect Fluorescent Troffers



U6F38FMC183S9