

Induction Light Series

Vandal Resistant Garage Lighter



VNGL40I

Housing:

Die Cast Aluminum Housing, 1/2" Coin Plugs with O-rings for Conduit & Photocell on Sides & Back, Textured Powdercoat Finish Over a Chromate Conversion Coating

Reflector:

White Powdercoat Steel Reflector

Lens:

Extended Clear Prismatic Polycarbonate Lens

Mounting:

Built-in Template for Mounting to an Electrical Box, or Use 1/2" Surface Conduit, Downrod, or Quick-Mount Bracket Available.

Wattage:

Induction: 40, 60 or 80w, 5000K

Listing & Ratings:

CSA: Listed for Wet Locations
(Damp Locations When Used with VNQM)

For Optional Battery Backup

(One PL Lamp):

BBI26 (1 x 26w)

BBI32 (1 x 32w)

BBI42 (1 x 42w)

Options:

2.5KV Surge Protection

Custom Colors Available Upon Request.


Complete Units (Includes Lamp & Ballast)

Catalog #	Wattage	Voltage	Lamp	Ballast
VNGL40I40U5K*-	40	120-277	Induction	Electronic
VNGL40I60U5K*-	60	120-277	Induction	Electronic
VNGL40I80U5K*-	80	120-277	Induction	Electronic

*Specify Color: BZ=Bronze, WH=White

- Add SP for Surge Protection

DIMENSIONS

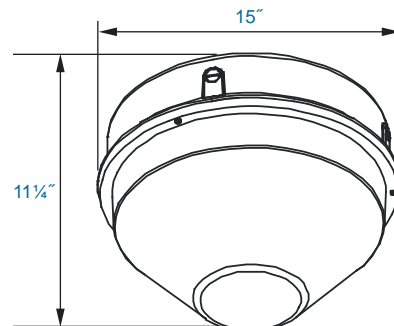

VNGL40I

KELSEY-KANE LIGHTING MFG. CO.

Voice & Text: 954-772-3187


E-Mail: info@kelsey-kane.com

Website: www.kelsey-kane.com

Catalog #	Description
VNGL40PC	Extended Clear Prismatic Polycarbonate Lens
VNQM	Hinged Quick-Mount Bracket, Stamped Steel, Mount Over Recessed Electrical Box, or Use 3/4" NPS Downrod for Pendant Mounting. CSA Listed for Damp Location Mounting.

Induction Light Series


Vandal Resistant Garage Lighter




VNGL40PC



VNQM

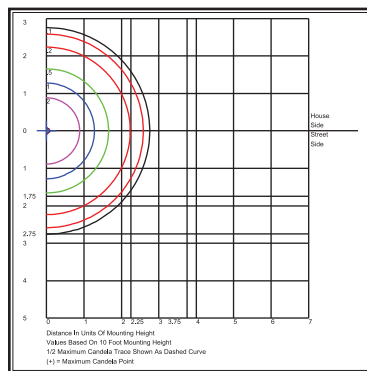

VNGL40140

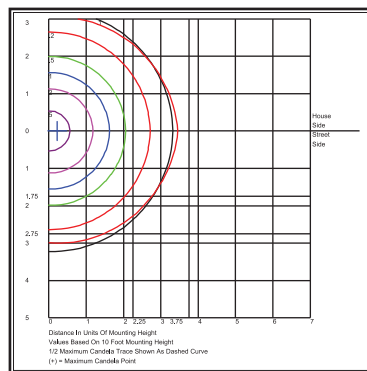

VNGL40180

KELSEY-KANE LIGHTING MFG. CO.
 Voice & Text: 954-772-3187
 E-Mail: info@kelsey-kane.com
 Website: www.kelsey-kane.com