




WP13Q **L70** **138,000 Hours**
25°C
EasyLED Mini Wall Pack

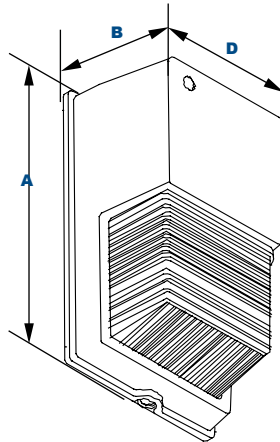

Dimensions

Width (D)	7¼" (197mm)
Length (B)	5½" (140mm)
Height (A)	13" (330mm)

WP13Q general purpose wall pack luminaire provides optically controlled wide spread light distribution designed to replace HID lighting systems up to 70w MH or HPS. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 8 to 15 feet can be used based on light level and uniformity requirements.

Specifications and Features:

Housing:

Die Cast Aluminum Housing with Conduit Access on Bottom & Back. Factory Installed Photocell Option Available. Gasketed

Finish:

Textured Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Molded Prismatic Borosilicate Glass Lens

Mounting Options:

Optional Cast Aluminum Mounting Plate Mounts Directly Over a 4" Recessed Outlet Box, or Use ½" Surface Conduit.

EasyLED LED:

Aluminum Boards

Wattage:

Array: 18.6w, System: 22.2w
(70w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60Hz; Dimmable Driver

Listing & Ratings:

CSA: Listed for Wet Locations.
Operating Temperatures: -40°C to +40°C
IP54 Sealed LED Compartment.

See Page 2 for Projected Lumen Maintenance Table.

5-Year Warranty.

Order Information Example:

WP13QF1X19U5KZSF

WP13Q	F	1X19	U	5K		
Model	Optics	Wattage	Driver	CCT	Color	Options
WP13Q = EasyLED Mini Wall Pack	F =Type IV	1X19 =19w	U =120-277V	5K =5000K	Z =Bronze C =Custom (Consult Factory)	SF =Single Fuse DF =Double Fuse PC1 =Photocell, 120VAC PC2 =Photocell, 240-277VAC

Project Information:

Project Name: _____ Fixture Type: _____
 Complete Catalog #: _____ Date: _____
 Comments: _____

Certification & Listings:



Specifications subject to change without notice. Rev. 051817



Accessories & Replacement Parts:



WPMP



WP13WG*

**Replacement Parts
 (Order separately, Field installed)**


WPMP Die Cast Wall Mount Plate with Locknut, O-ring & Weatherproof Gasket

**Accessories
 (Order separately, Field installed)**

WP13WG Wire Guard, Stainless Steel Construction, Includes Hardware.

**Replacement Parts
 (Order separately, Field installed)**

WP13GL	Molded Prismatic Borosilicate Glass Lens
PC1	120VAC, Photocell
PC2	240-277VAC, Photocell




WP13GL



PC1 & PC2

*Shown Mounted

Photometric Data

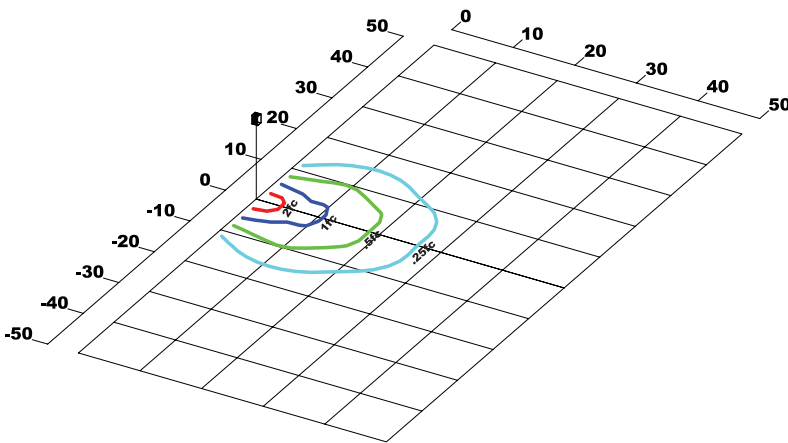

WP13QF1X19U5K
 Type IV

Grid in MH
 MH=10 Feet

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI				
				Lumens	LPW	B	U	G
EasyLED 19w	116	22	Type IV	1,543	70	0	3	3

Projected Lumen Maintenance

Data shown for 5000 CCT	Input Watts	Compare to MH				
		Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
TM-21-11	22	1.00	0.95	0.89	0.78	138,000
L70 Lumen Maintenance @ 25°C / 77°F	22	1.00	0.86	0.72	0.43	53,000
TM-21-11	22	1.00	0.92	0.84	0.68	62,000
L80 Lumen Maintenance @ 40°C / 104°F	22	1.00	0.92	0.84	0.68	62,000

NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 116mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.