



WP7Q

L70
25°C


133,000 Hours

EasyLED Polycarbonate Entry Light



Dimensions

Width (D)	5 1/4" (136mm)
Length (B)	2 1/2" (64mm)
Height (A)	8 1/4" (207mm)

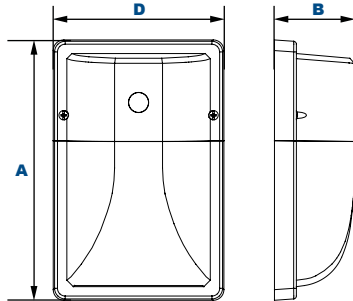

The WP7Q general purpose entry light luminaire provides optically controlled wide spread light distribution designed to replace HID lighting systems up to 70w MH or HPS. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings, apartment complexes and medical facilities. Mounting heights of 8 to 12 feet can be used based on light level and uniformity requirements.

Specifications and Features:

Housing:

Die Cast Back Plate with White Powdercoat Finish. Molded Polycarbonate Front Housing. 120-277V Photocell Included.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP65 Sealed LED Compartment. ADA Compliant.

Finish:

Polycarbonate Front Housing in Black with White Powdercoat Finish Back Plate.

Lens:

SoftLED LumaLens Polycarbonate Opal Vandal-Resistant Lens Eliminates LED Hot Spots

Mounting Options:

Mount Directly Over a 4" Recessed Outlet Box.

EasyLED LED:

Aluminum Boards

Wattage:

Array: 11w; System: 13.8w; (70w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60Hz, Non-Dimmable

Controls:

Factory-Installed Photocell is Internally Wired for Switching Within the Housing. Fixtures are Tested with LEPG Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty:

5-Year Warranty for -40°C to +40°C Environment.

Order Information Example:

WP7QF1X11U5KB

WP7Q	F	1X11	U	5K	B
Model	Optics	Wattage	Driver	CCT	Color
WP7Q = EasyLED Polycarbonate Entry Light	F =Type IV	1X11 =11w	U =120-277V	5K =5000K	B =Black

Project Information:


Project Name: _____ Fixture Type: _____
 Complete Catalog #: _____ Date: _____
 Comments: _____

Certification & Listings:





Photometric Data

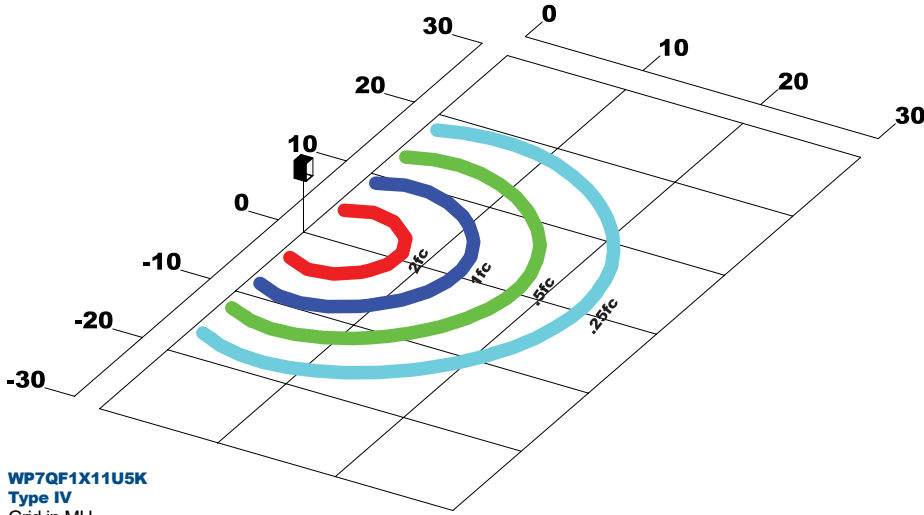

WP7QF1X11U5K
 Type IV
 Grid in MH
 MH=10 Feet

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI			
				Lumens	B	U	G
EasyLED 11w	170	14	Type IV	1490	0	3	2