




WP9Q **L70** **187,000 Hours**
 25°C
EasyLED Polycarbonate Entry Light - Round

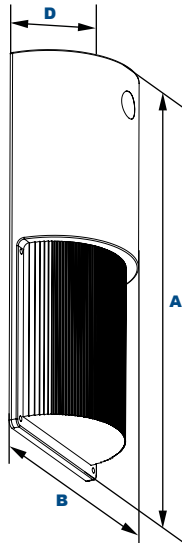

Dimensions

Width (D)	5 ⁹ / ₁₆ " (135mm)
Length (B)	2 ¹³ / ₁₆ " (72mm)
Height (A)	12 ¹ / ₄ " (311mm)

WP9Q general purpose wall pack luminaire provides optically controlled wide spread light distribution designed to replace HID lighting systems up to 70w MH or HPS. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings, apartment complexes and medical facilities. Mounting heights of 8 to 12 feet can be used based on light level and uniformity requirements.

Specifications and Features:

Housing:

Stamped Galvanized Back Plate with White Powdercoat Finish. Molded Polycarbonate Front Housing. 120V Photocell Included. Fixture is for wired 120V Standard.

Finish:

Polycarbonate Front Housing in Bronze with White Powdercoat Finish Back Plate.

Lens:

Standard Clear Polycarbonate Prismatic Lens

Mounting Options:

Mount Directly Over a 4" Recessed Outlet Box. Threaded Stem and Nut Included.

EasyLED LED:

Aluminum Boards

Wattage:

Array: 7.3w; System: 9.2w
 (70w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60Hz; Dimmable Driver

Listing & Ratings:

CSA: Listed for Wet Locations.
 Operating Temperatures: -40°C to +40°C
 IP54 Sealed LED Compartment.
 ADA Compliant

See Page 2 for Projected Lumen Maintenance Table.

5-Year Warranty.

Order Information Example:

WP9QF1X7U5KZSF

WP9Q	F	1X7	U	5K	Z	
Model	Optics	Wattage	Driver	CCT	Color	Options

WP9Q=EasyLED Polycarbonate Entry Light-Round

F=Type IV

1X7=7w

U=120-277V

5K=5000K

Z=Bronze

SF=Single Fuse
 DF=Double Fuse

Project Information:


Project Name: _____ Fixture Type: _____
 Complete Catalog #: _____ Date: _____
 Comments: _____

Certification & Listings:





Photometric Data

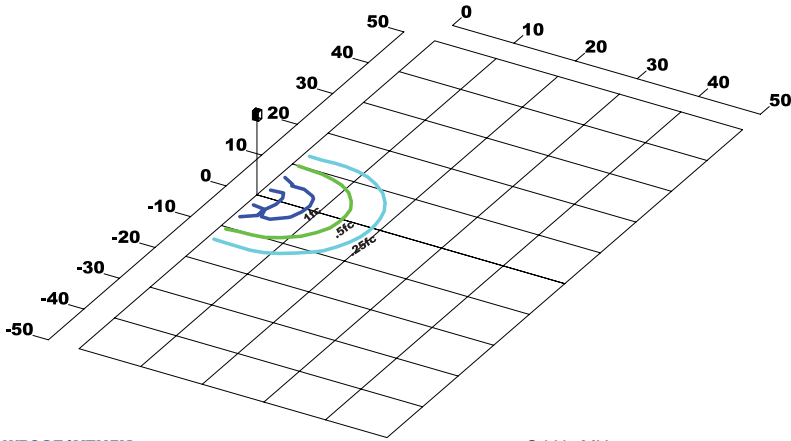

WP9QF1X7U5K
 Type IV

Grid in MH
 MH=10 Feet

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI				
				Lumens	LPW	B	U	G
EasyLED 7w	116	9	Type IV	679	75	0	3	1

Projected Lumen Maintenance

Data shown for 5000 CCT		Compare to MH					
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C	
L70 Lumen Maintenance @ 25°C / 77°F	9	1.00	0.96	0.92	0.84	187,000	
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C	
L70 Lumen Maintenance @ 50°C / 122°F	9	1.00	0.93	0.86	0.72	109,000	
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C	
L80 Lumen Maintenance @ 40°C / 104°F	9	1.00	0.94	0.88	0.76	84,000	

NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 116mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.