




**WPR25HCQ** **L70** **187,000 Hours**  
 25°C  
**EasyLED Excel Round Bulkhead Half Cutoff**

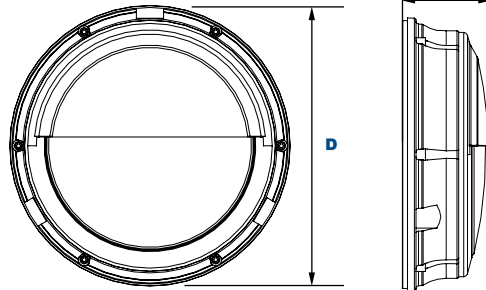

**Dimensions**

|                     |              |
|---------------------|--------------|
| <b>Diameter (D)</b> | 12½" (318mm) |
| <b>Height (A)</b>   | 4¾" (111mm)  |

The Excel Round Bulkhead is designed to replace HID lighting systems up to 100w MH or HPS. The half-cutoff frame helps protect the polycarbonate lens and adds a decorative appearance. Typical applications include office and public buildings, condominiums, schools, shopping malls, and hospitality. Recommended mounting heights are 8 to 20 feet.

**Specifications and Features:**

**Housing:**

Die Cast Gasketed Aluminum Half Cutoff Front Frame and Housing with Integral Heat Sinking and Driver Compartment. Nickel-Plated Stainless Steel Hardware. Photocell Adaptable.

**Listing & Ratings:**

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP66 Sealed LED Compartment.

**Finish:**

Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

**Lens:**

SoftLED LumaLens Polycarbonate Opal Vandal-Resistant Lens Eliminates LED Hot Spots

**Mounting Options:**

Surface Mount

**EasyLED LED:**

Aluminum Boards

**Wattage:**

Array: 17w, System: 19.7w; (100w HID Equivalent)

**Driver:**

Electronic Driver, 120-277V, 50/60Hz or 347V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

**Controls:**

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPC Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

**Warranty:**

5-Year Warranty for -40°C to +50°C Environment.

See Page 2 for Projected Lumen Maintenance Table.

**Order Information Example:**

WPR25HCQF1X17U5KLZSF

| WPR25HCQ   | F         | 1X17     |                      |                                  | L  |   |  |
|--|-----------|----------|----------------------|----------------------------------|--|---|--|
| Model  | Optics    | Wattage  | Driver               | CCT                              | Lens   | Color   | Options  |
| WPR25HCQ= EasyLED Excel Round Bulkhead Half Cutoff | F=Type IV | 1X17=17w | U=120-277V<br>C=347V | 3K=3000K<br>4K=4000K<br>5K=5000K | L=SoftLED LumaLens Opal Polycarbonate Array Lens | Z=Bronze<br>W=White<br>C=Custom (Consult Factory) | SF=Single Fuse (120-277V Only)<br>DF=Double Fuse (120-277V Only)<br>SP=Surge Protector<br>PC3=Photocell, 120-277VAC<br>P10=Pencil Photocell, 120VAC<br>P12=Pencil Photocell, 277VAC<br>P14=Pencil Photocell, 120-277VAC<br>S2=Microwave Sensor with Dimming for Mounting Heights of 8 to 40'. (120-277V Only)<br>S4=Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19', (120-277V Only)<br>BU=Battery Backup, 90 Minutes |

**Project Information:**

Project Name: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 Complete Catalog #: \_\_\_\_\_ Date: \_\_\_\_\_  
 Comments: \_\_\_\_\_

**Certification & Listings:**






**Accessories & Replacement Parts:**




| Replacement Parts<br>(Order Separately, Field Installed) |  |
|--|--|
| P18103   | 120-277VAC Photocell   |
| P18110   | 110-130V 120VAC Pencil Photocell   |
| P18112   | 208-277V 240VAC Pencil Photocell   |
| P18114   | 120-277V, 50/60Hz Pencil Photocell   |
| P17117   | Internal Microwave Sensor with Dimming for Mounting Heights of 8 to 40'. 120-277VAC, 50/60Hz.            |
| P17123   | Internally Mounted Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19', 120-277VAC, 50/60Hz |

For Replacement Battery Backup, see the LEPG LED Battery Backup Specification Sheet.

**Photometric Data**

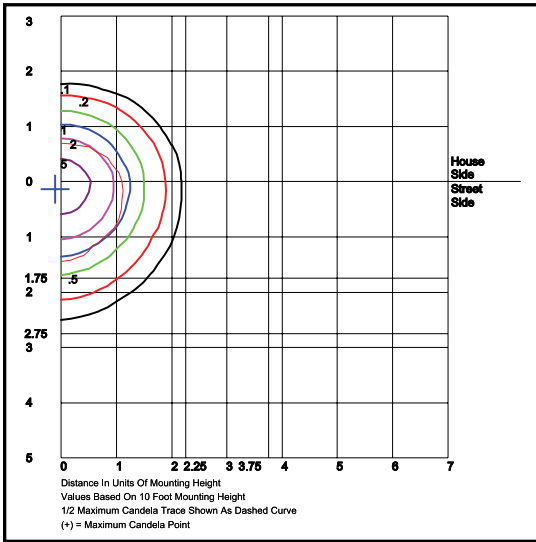

**WPR25HCQF1X17U5K**  
 Type IV  
 Grid in MH  
 MH=10 Feet

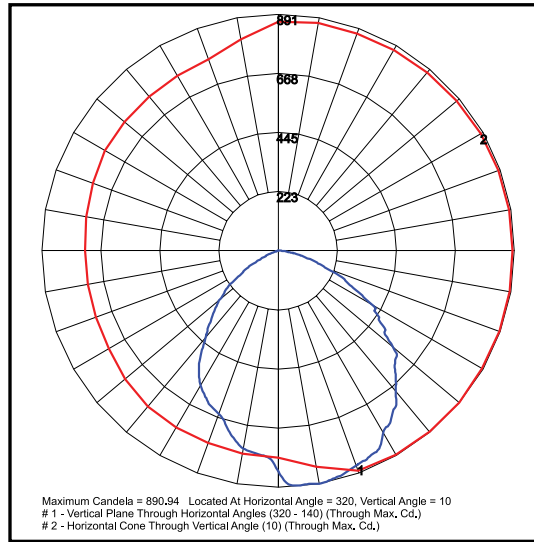

**WPR25HCQF1X17U5K**  
 Type IV

**Photometric Performance**

| LED Board Watts | Drive Current (mA) | Input Watts | Optics  | 5000 CCT 80 CRI |     |   |   |   | 4000 CCT 80 CRI |     |   |   |   | 3000 CCT 80 CRI |     |   |   |   |
|-----------------|--------------------|-------------|---------|-----------------|-----|---|---|---|-----------------|-----|---|---|---|-----------------|-----|---|---|---|
|                 |                    |             |         | Lumens          | LPW | B | U | G | Lumens          | LPW | B | U | G | Lumens          | LPW | B | U | G |
| EasyLED 17w     | 525                | 20          | Type IV | 1,935           | 97  | 1 | 1 | 0 | 1,858           | 93  | 1 | 1 | 0 | 1,713           | 86  | 1 | 1 | 0 |

**Projected Lumen Maintenance**

| Data shown for 5000 CCT              | Input Watts | Compare to MH |            |            |             |                      |
|--------------------------------------|-------------|---------------|------------|------------|-------------|----------------------|
|                                      |             | Initial       | 25,000 Hrs | 50,000 Hrs | 100,000 Hrs | Calculated L70@ 25°C |
| TM-21-11                             | 20          | 1.00          | 0.96       | 0.92       | 0.84        | 187,000              |
| L70 Lumen Maintenance @ 25°C / 77°F  | 20          | 1.00          | 0.96       | 0.91       | 0.82        | 113,000              |
| TM-21-11                             | 20          | 1.00          | 0.94       | 0.89       | 0.77        | 88,000               |
| L80 Lumen Maintenance @ 40°C / 104°F | 20          | 1.00          | 0.94       | 0.89       | 0.77        | 88,000               |

**NOTES:**  
 1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.  
 2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.