

EasyLED Series

EasyLED Dart Square Bulkhead Open Frame



WPS22OFQ

Housing:

Die Cast Aluminum Housing & Open Front Frame,
Textured Powdercoat Finish Over a Chromate
Conversion Coating, Gasketed

Lens:

LumaLens Polycarbonate Opal Lens

Mounting:

Surface Mount

LumaFit LED:

Array Lumens: 3,276

Delivered Lumens: 2,013

CRI: 85

CCT: 5000K

Rated Life: 50,000 Hours

5-Year Warranty

Aluminum Boards

Wattage:

Array: 22.7w, System: 27.2w

Driver:

Electronic Driver, 120-277V, 50/60Hz or

347/480V, 50/60Hz;

Dimmable Driver

Listing & Ratings:

CSA: Listed for Wet Locations, Wall Mount Only

IP65

Operating Temperatures: -40°C to +40°C

Options:

Battery Backup

Custom Colors Available Upon Request.

KELSEY-KANE LIGHTING MFG. CO.

Voice & Text: 954-772-3187

E-Mail: info@kelsey-kane.com

Website: www.kelsey-kane.com

EasyLED Dart Square Bulkhead Open Frame

Catalog #

Description


Complete Units

Ordering Information

Example: WPS22OFQF1X23U5KLZSF

WPS22OF	Model:	WPS22OF
Q	LED Mfr:	Q=QSSI
F	Optics:	F=Medium Beam Spread
1X	Number of Arrays:	1X=One
23	Wattage:	23=23w
U	Ballast:	U=120-277V, H=347/480V
5K	CCT:	5K=5000K
L	Lens:	L=LumaLens Polycarbonate Opal Lens
Z	Color:	Z=Bronze, W=White
-	Mounting:	N/A
SF	Options:	SF=Single Fuse, DF=Double Fuse

DIMENSIONS

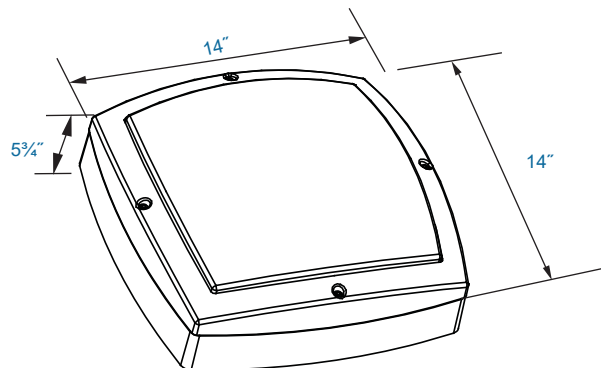

WPS22OFQ


Catalog #	Description
3EBL1202774500	Provides 90 Minutes of Backup Power.

EasyLED Series

EasyLED Dart Square Bulkhead Open Frame



3EBL1202774500

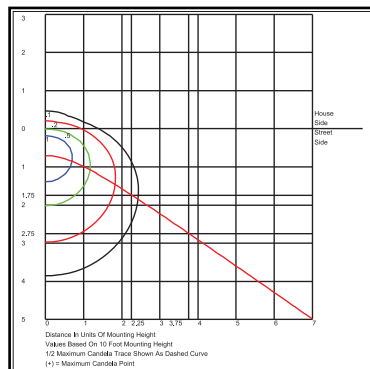

WPS220FQF1X23U5KO

KELSEY-KANE LIGHTING MFG. CO.
 Voice & Text: 954-772-3187
 E-Mail: info@kelsey-kane.com
 Website: www.kelsey-kane.com