

Wall Pack Series

12" Square Wall Pack



WPS30

Housing:

Die Cast Aluminum Housing & Front Frame with Hood, ½" Coin Plugs with O-rings for Conduit & Photocell, Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating

Reflector:

Aluminum Reflector

Lens:

Polycarbonate Prismatic Lens

Socket:

HID: Porcelain 4KV Pulse Rated Medium Base Socket with Nickel Plated Screw Shell
 PL: Plug-In Type, GX24Q-4

Mounting:

Mount Over a 4" Recessed Outlet Box, or Use ½" Surface Conduit.

Wattage:

High Pressure Sodium: 35 to 150w
 Metal Halide: 50 to 100w
 Pulse Start: 150w
 Compact Fluorescent: 1 x 26 to 42w,
 2 x 26 to 42w

Listing & Ratings:

CSA: Listed for Wet Locations


Add: PC1 120V Photocell (Field Installed)
 PC2 240-277V Photocell (Field Installed)
 QRS Quartz Restrike Module

Other Wattages & Custom Colors Available Upon Request.

KELSEY-KANE LIGHTING MFG. CO.
 Voice & Text: 954-772-3187
 E-Mail: info@kelsey-kane.com
 Website: www.kelsey-kane.com

Kit(s)				
Catalog #	Description			
WPS30	12" Square Wall Pack, HID Kit			
WPS30F1	12" Square Wall Pack, Single PL Kit			
WPS30F2	12" Square Wall Pack, Twin Fluorescent Kit			
Complete Units (Lamp Included)				
Catalog #	Wattage	Voltage	Lamp	Ballast
WPS30H35R120L	35	120	HPS	R-NPF
WPS30H50R120L	50	120	HPS	R-NPF
WPS30H70R120L	70	120	HPS	R-NPF
WPS30H100R120L	100	120	HPS	R-NPF
WPS30H150R120L	150	120	HPS	R-NPF
WPS30H50DL	50	120/277	HPS	HX-HPF
WPS30H70QL	70	Quad	HPS	HX-HPF
WPS30H100QL	100	Quad	HPS	HX-HPF
WPS30H150QL	150	Quad	HPS	HX-HPF
WPS30M50DL	50	120/277	MH	HX-HPF
WPS30M70QL	70	Quad	MH	HX-HPF
WPS30M100QL	100	Quad	MH	HX-HPF
WPS30P150QL	150	Quad	PS	HX-HPF
WPS30F26EL	1 x 26	120-277	PL	Electronic
WPS30F32EL	1 x 32	120-277	PL	Electronic
WPS30F42EL	1 x 42	120-277	PL	Electronic
WPS30F52EL	2 x 26	120-277	PL	Electronic
WPS30F64EL	2 x 32	120-277	PL	Electronic
WPS30F84EL	2 x 42	120-277	PL	Electronic

DIMENSIONS

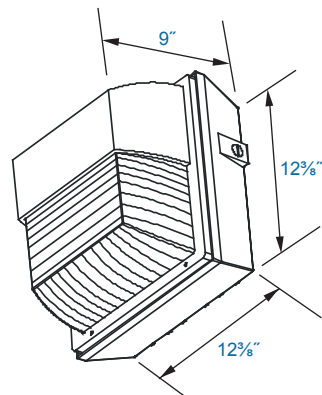

WPS30