

## Area Light Series

### Small Adjusta Area/Wall Light with IES Type V Reflector



**AD205**  
(Shown Mounted on Pole)

#### Housing:

Die Cast Housing, Front Frame & Ballast Box with Bronze Powdercoat Finish Over a Chromate Conversion Coating. Housing Swivels From 0° to 30°, & Includes Angle Indicators at Adjustment Points. Hinged Front Frame and Latch for Tool-Less Entry for Relamping.

#### Reflector:

Aluminum IES Type V Reflector

#### Lens:

Tempered Glass Lens

#### Socket:

Porcelain 4KV Pulse Rated Medium or 5KV Pulse Rated Mogul Base Socket with Nickel Plated Screw Shell

#### Mounting:

Easy-Hang Wall Bracket (Included); Allows One-Person Mounting! Pole Mount Using Extruded Mounting Arms or Slipfitter.

#### Wattage:

High Pressure Sodium: 35 to 150w

Metal Halide: 50 to 100w

Pulse Start: 150w


#### Listing & Ratings:

CSA: Listed for Wet Locations

Other Wattages & Custom Colors Available Upon Request.

| Kit(s)                         |  |         |      |         |
|--------------------------------|--|---------|------|---------|
| Catalog #                      | Description  |         |      |         |
| AD205                          | Small Adjusta Area/Wall Light with IES Type V Reflector, HID Kit |         |      |         |
| Complete Units (Lamp Included) |  |         |      |         |
| Catalog #                      | Wattage  | Voltage | Lamp | Ballast |
| AD205H35R120L                  | 35   | 120     | HPS  | R-NPF   |
| AD205H50R120L                  | 50   | 120     | HPS  | R-NPF   |
| AD205H70R120L                  | 70   | 120     | HPS  | R-NPF   |
| AD205H100R120L                 | 100  | 120     | HPS  | R-NPF   |
| AD205H150R120L                 | 150  | 120     | HPS  | R-NPF   |
| AD205H50DL                     | 50   | 120/277 | HPS  | HX-HPF  |
| AD205H70QL                     | 70   | Quad    | HPS  | HX-HPF  |
| AD205H100QL                    | 100  | Quad    | HPS  | HX-HPF  |
| AD205H150QL                    | 150  | Quad    | HPS  | HX-HPF  |
| AD205M50DL                     | 50   | 120/277 | MH   | HX-HPF  |
| AD205M70QL                     | 70   | Quad    | MH   | HX-HPF  |
| AD205M100QL                    | 100  | Quad    | MH   | HX-HPF  |
| AD205P150QL                    | 150  | Quad    | PS   | HX-HPF  |

**DIMENSIONS**

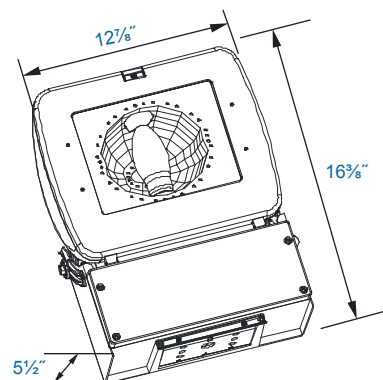


**AD205**

**KELSEY-KANE LIGHTING MFG. CO.**  
Voice & Text: 954-772-3187  
E-Mail: [info@kelsey-kane.com](mailto:info@kelsey-kane.com)  
Website: [www.kelsey-kane.com](http://www.kelsey-kane.com)

| Catalog # | Description   |
|-----------|---|
| FL73SFX   | External Mount Slipfitter, Die Cast with Hardware & Angle Indicator   |
| FLEM6*    | 6" Aluminum Extruded Mounting Arm, Bronze, Gasket & Hardware. Fits Square Poles.  |
| FLEM10*   | 10" Aluminum Extruded Mounting Arm, Bronze, Gasket & Hardware. Fits Square Poles.   |
| FLEM12*   | 12" Aluminum Extruded Mounting Arm, Bronze, Gasket & Hardware. Fits Square Poles.   |
| PTASUNV   | Square Pole Tenon Adaptor Allows Installation of up to 4 Fixtures, Fits 2 3/8" Diameter Vertical Tenon, Bronze Finish. Use FLEMs. |
| FLEMWM    | Heavy-duty Steel Wall Bracket for FLEM Mounting Arms, Bronze Powdercoat Finish.   |

\*Add R for Round Pole Mounting, Fits 4" Diameter Poles.

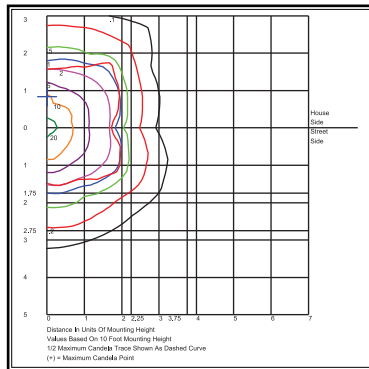

AD205M175

Area Light Series

Small Adjustable Area/Wall Light with IES Type V Reflector



FL73SFX



FLEM6



FLEM10



FLEM12



PTASUNV



FLEMWM

**KELSEY-KANE LIGHTING MFG. CO.**  
 Voice & Text: 954-772-3187  
 E-Mail: [info@kelsey-kane.com](mailto:info@kelsey-kane.com)  
 Website: [www.kelsey-kane.com](http://www.kelsey-kane.com)