

Vandal Resistant Series

Medium Vandal Resistant Fixture HID & Fluorescent



**VN30,
VN30HF42EL**

Housing:

Die Cast Aluminum Housing, 1/2" Coin Plugs with O-rings for Conduit & Photocell on Two Sides & Back, Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating.

Reflector:

White Powdercoat Steel Reflector

Lens:

Clear Prismatic Polycarbonate Lens

Socket:

VN30: Porcelain 4KV Pulse Rated Medium Base Socket with Nickel Plated Screw Shell

VN30HF: Plug-In Type, GX24Q-4

Mounting:

Mount Directly Over a Recessed Electrical Box or Use 1/2" Surface Conduit.

Wattage:

High Pressure Sodium: 35 to 70w

Metal Halide: 50 to 70w

Compact Fluorescent: 1 x 26 to 42w

Listing & Ratings:

CSA: Listed for Wet Locations

Add: PC1 120V Photocell (Field Installed)


PC2 240-277V Photocell (Field Installed)

Other Wattages & Custom Colors Available
Upon Request.

KELSEY-KANE LIGHTING MFG. CO.
Voice & Text: 954-772-3187
E-Mail: info@kelsey-kane.com
Website: www.kelsey-kane.com

Kit(s)				
Catalog #	Description			
VN30	Medium Vandal Resistant, HID Kit			
VN30HF	Medium Vandal Resistant, Single PL Kit			
Complete Units (Lamp Included)				
Catalog #	Wattage	Voltage	Lamp	Ballast
VN30H35R120L	35	120	HPS	R-NPF
VN30H50R120L	50	120	HPS	R-NPF
VN30H70R120L	70	120	HPS	R-NPF
VN30H50DL	50	120/277	HPS	HX-HPF
VN30H70QL	70	Quad	HPS	HX-HPF
VN30M50DL	50	120/277	MH	HX-HPF
VN30M70QL	70	Quad	MH	HX-HPF
VN30HF26EL	1 x 26	120-277	PL	Electronic
VN30HF32EL	1 x 32	120-277	PL	Electronic
VN30HF42EL	1 x 42	120-277	PL	Electronic

DIMENSIONS

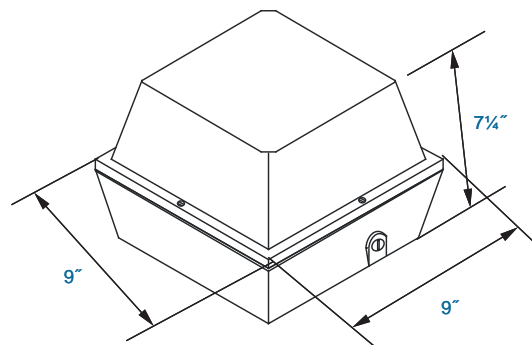


**VN30,
VN30HF42EL**


Catalog #	Description
VN30PC	Clear Polycarbonate Replacement Lens
VN30PW	White Polycarbonate Replacement Lens

Vandal Resistant Series

**Medium Vandal Resistant Fixture
HID & Fluorescent**



VN30PC,
VN30PW

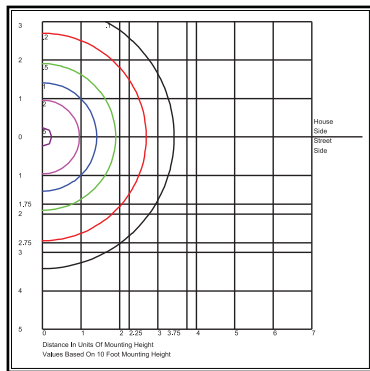

VN30M70

KELSEY-KANE LIGHTING MFG. CO.
 Voice & Text: 954-772-3187
 E-Mail: info@kelsey-kane.com
 Website: www.kelsey-kane.com