

## Wall Pack Series

### Crescent II Up/Down Wall Sconce



WP34

#### Housing:

Decorative Die Cast Housing, Textured White or Bronze Powdercoat Finish Over a Chromate Conversion Coating

#### Reflector:

Aluminum Reflector, Includes Removable Baffle to Convert Fixture From Down Light Only to Up/Down Light

#### Lens:

Clear Tempered Glass Lenses

#### Socket:

HID: Porcelain 4KV Pulse Rated Medium Base Socket with Nickel Plated Screw Shell

PL: Plug-In Type, GX24Q-4

#### Mounting:

Mount Over a 4" Recessed Outlet Box Includes Easy-Hang Wall Mounting Bracket

#### Wattage:

High Pressure Sodium: 50 to 70w

Metal Halide: 50 to 70w

Compact Fluorescent: 1 x 26 to 42w,

2 x 26 to 42w

#### Listing & Ratings:

CSA: Listed for Wet Locations

**Add:** PC1 120V Photocell (Field Installed)  
PC2 240-277V Photocell (Field Installed)

Other Wattages & Custom Colors Available Upon Request.

**KELSEY-KANE LIGHTING MFG. CO.**  
Voice & Text: 954-772-3187  
E-Mail: [info@kelsey-kane.com](mailto:info@kelsey-kane.com)  
Website: [www.kelsey-kane.com](http://www.kelsey-kane.com)


Kit(s)	Description
WP34*	Crescent II Up/Down or Down Only Wall Sconce, HID Kit
WP34F1*	Crescent II Up/Down or Down Only Wall Sconce, Single Fluorescent Kit
WP34F2*	Crescent II Up/Down Wall or Down Only Sconce, Twin Fluorescent Kit

Complete Units (Lamp Included)				
Catalog #	Wattage	Voltage	Lamp	Ballast
WP34H50R120L*	50	120	HPS	R-NPF
WP34H70R120L*	70	120	HPS	R-NPF
WP34H50DL*	50	120/277	HPS	HX-HPF
WP34H70QL*	70	Quad	HPS	HX-HPF
WP34M50DL*	50	120/277	MH	HX-HPF
WP34M70QL*	70	Quad	MH	HX-HPF
WP34F26EL*	1 x 26	120-277	PL	Electronic
WP34F32EL*	1 x 32	120-277	PL	Electronic
WP34F42EL*	1 x 42	120-277	PL	Electronic
WP34F52EL*	2 x 26	120-277	PL	Electronic
WP34F64EL*	2 x 32	120-277	PL	Electronic
WP34F84EL*	2 x 42	120-277	PL	Electronic

\*Specify Color: BZ=Bronze or WH=White

**DIMENSIONS**

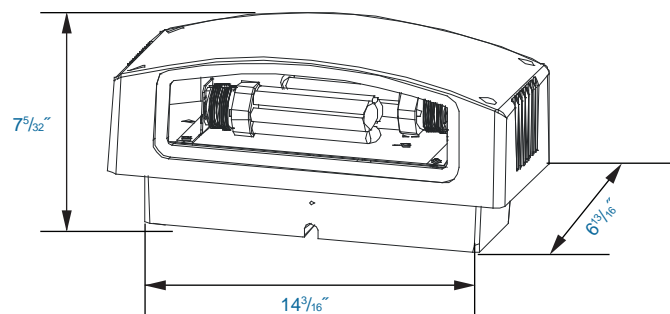

WP34